



# SCC shield clamps

A new generation, simplifying shielding

# SCC shield clamps

## Optimum shielding – easy mounting

SCC shield clamps feature quick and easy handling, and an optimum shielding contact that reliably dissipates interferences. All shield clamps can be mounted with just one hand, without the need for tools. The force of the spring-cage connection technology is finely tuned so that the largest possible contact area is created without excessive deformation of the conductor. The large marking areas can be marked clearly to indicate which cables are to be connected, ensuring easy assignment.



### Secure connection

The shield connection requires minimum effort. The contact spring, which is not compressed when installed, enables a secure and fast connection.



### Easy to open

The terminals can be opened quickly without applying much force. To ensure that the terminal can only be opened intentionally, a bladed screwdriver with a maximum blade width of 3.5 mm is required.



### High contact quality

The design of the contact spring guarantees a reproducible and long-term stable contact quality. The spring centers the conductor and compensates for conductor settling effects.



### Low transfer impedance

The shield clamps have a direct, large-surface low-resistance contact with the neutral busbar (NLS) and therefore support a low transfer impedance.



### Clear cabling

The clear marking on the terminal clamp ensures that the cables can be assigned in accordance with the circuit diagram.




### Mounting types

The three mounting types NLS, DIN rail, and direct mounting provide you with a high degree of flexibility in shielding design.

# SCC shield clamps

## Up to a cable diameter of 20 mm

SCC shield clamps are available in four versions, thus enabling consistent shielding for cable diameters from 2 mm to 20 mm. The shield clamps are vibration-resistant (EN 50155), and their resistance to corrosion is tested in accordance with the DIN 60068 168-hour salt-spray test. To ensure that the shielding is effective against interferences, the shield clamp encloses at least 75% of the shielding braid.

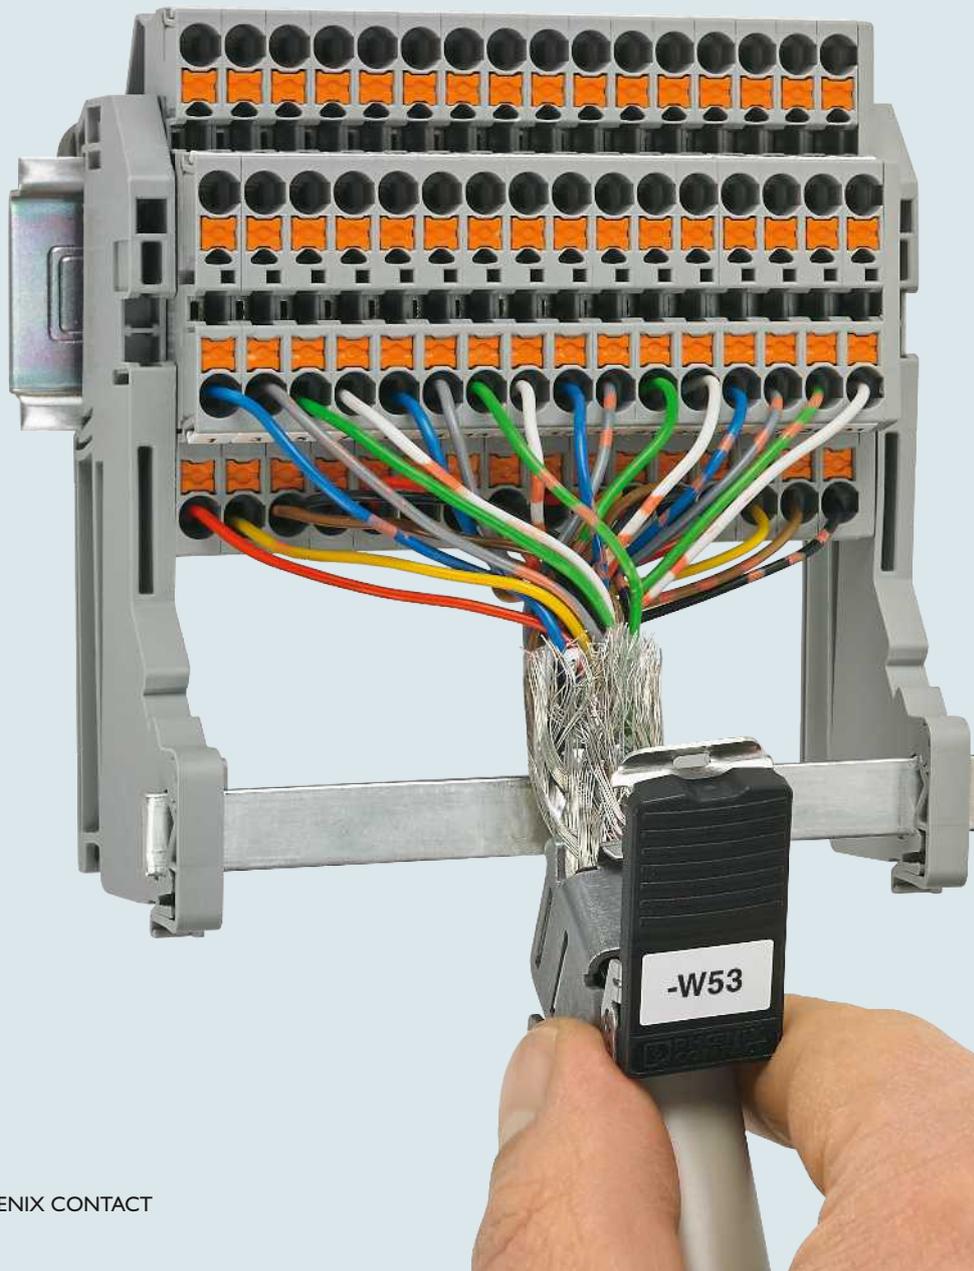

## Electromagnetic compatibility (EMC)

According to the definition in the IEC 61000 series of standards, EMC is the ability of a mechanism or system to function satisfactorily in its electromagnetic environment without interfering with other systems.

There are therefore limit values that must be observed to ensure satisfactory functioning. The correct shielding of cables

and conductors is necessary to ensure that these limit values are not exceeded.

To reduce interference couplings and interference emissions, the cable shielding can, for example, be contacted with the control cabinet inlet. Furthermore, an EMC seal on the housing door is recommended.


	Commercial zone	Industrial zone
Electrical field strength	3 V/m	10 V/m
Magnetic field strength	3 A/m	30 A/m

Example IEC 61000-6/-2: Permitted field strengths

## Shield connection

The type of shield connection used depends mainly on the type of interference to be expected. For the suppression of electrical fields, it is necessary to ground (1) the shield at one end. However, interferences caused by an alternating magnetic field are only suppressed when the shield is grounded at both ends. Connecting the shield at both ends (2), however, creates a ground loop, bringing with it the associated well-known drawbacks. Galvanic interferences along the reference potential

in particular influence the useful signal, and reduce the shielding effect. Here, the use of tri-axial cables (4), in which the inner shield is connected at one end and the outer shield at both ends, can remedy this problem. To reduce galvanic interferences when the conductor shield is connected at both ends, one end is often also connected to the reference potential via a capacitor (3). This interrupts the ground loop, at least for direct and low-frequency currents.

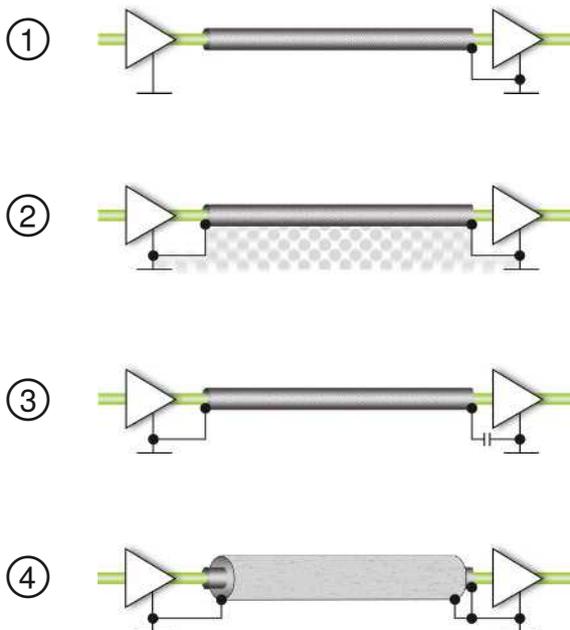

Types of shield connection

### Ground loop

A ground loop is an arrangement in which the reference potential is closed to form a ring.

## SCC shield clamps

NLS mounting			
	Cable diameter	Item	Order No.
	2 mm ... 5 mm	SCC 5	<a href="#">1019420</a>
	3 mm ... 10 mm	SCC 10	<a href="#">1019421</a>
	8 mm ... 15 mm	SCC 15	<a href="#">1019422</a>
	10 mm ... 20 mm	SCC 20	<a href="#">1019423</a>
Direct mounting			
	Cable diameter	Item	Order No.
	2 mm ... 5 mm	SCC 5-F	<a href="#">1019425</a>
	3 mm ... 10 mm	SCC 10-F	<a href="#">1019426</a>
	8 mm ... 15 mm	SCC 15-F	<a href="#">1019427</a>
	10 mm ... 20 mm	SCC 20-F	<a href="#">1019428</a>
DIN rail mounting			
	Cable diameter	Item	Order No.
	2 mm ... 5 mm	SCC 5-NS35	<a href="#">1019436</a>
	3 mm ... 10 mm	SCC 10-NS35	<a href="#">1019440</a>
	8 mm ... 15 mm	SCC 15-NS35	<a href="#">1019443</a>
	10 mm ... 20 mm	SCC 20-NS35	<a href="#">1019446</a>

## Accessories

Support brackets for DIN rail mounting of neutral busbars			
	NLS receptacle	Item	Order No.
	NLS receptacle on one side	AB-SK	<a href="#">3025341</a>
	NLS receptacle on both sides	AB-SK 65-D	<a href="#">3026900</a>

### Support brackets for direct mounting of neutral busbars

	Installation	Item	Order No.
	Non-contacting design	AB/SS	<a href="#">0404428</a>
	Contact-forming assembly on the mounting plate	AB/SS-M	<a href="#">3025888</a>

### Support brackets for direct mounting of shield clamps

	Mounting	Item	Order No.
	Direct mounting	AB-SK/E	<a href="#">3026476</a>
	DIN rail mounting	AB-SK/E	<a href="#">3213111</a>

### Neutral busbars


	Dimensions	Item	Order No.
	3 mm x 10 mm x 1,000 mm	NLS-CU 3/10 SN 1000MM	<a href="#">0402174</a>
	3 mm x 10 mm x 2,000 mm	NLS-CU 3/10 SN 2000MM	<a href="#">0402006</a>

### Self-adhesive marking material

	Suitable for	Item	Order No.
	SCC 5	EML (10X7)R	<a href="#">0816663</a>
	SCC 10	EML (10X7)R	<a href="#">0816663</a>
	SCC 15	EML (15X9)R	<a href="#">0815677</a>
	SCC 15	EML (15XE)R	<a href="#">1117364</a>
	SCC 20	EML (20XE)R	<a href="#">0803452</a>

### Printers

	Item	Order No.
	THERMOMARK ROLL 2.0	<a href="#">1085260</a>
	THERMOMARK ROLLMASTER 600	<a href="#">0804663</a>

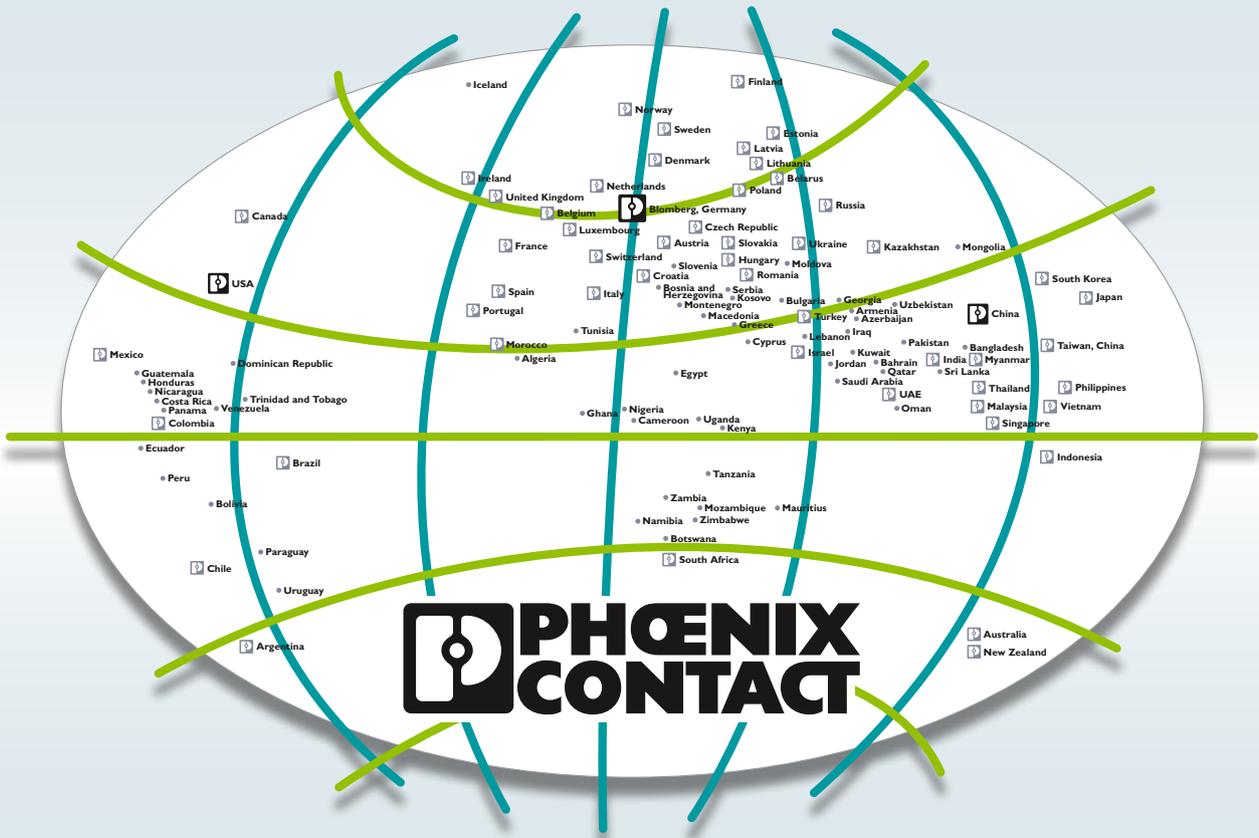

## Open communication with customers and partners worldwide

Phoenix Contact is a global market leader based in Germany. We are known for producing future-oriented components, systems, and solutions in the fields of electrical engineering, electronics, and automation. With a global network reaching across more than 100 countries with over 17,600 employees, we maintain close relationships with our customers, something we believe is essential for our common success.

Our wide variety of innovative products makes it easy for our customers to implement the latest technology in a variety of applications and industries. We focus on developing the fields of energy, infrastructure, process, and factory automation.

You can find your local partner at  
[phoenixcontact.com](http://phoenixcontact.com)